



GEO-STOR[®]

Geothermal Water Storage w/ Electric Backup

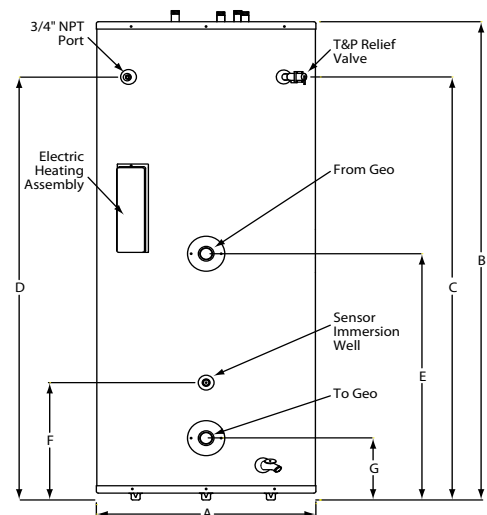

- ◆ *C_glass*[®] - porcelain fused-to steel is impervious to chlorine and caustics - *the ideal water vessel*
- ◆ 4500W electric heating element
- ◆ 60, 80 and 119 gallon capacities
- ◆ 2" Non-CFC zero ozone depleting foam insulation
- ◆ Temperature sensor well (accepts 6mm probe)
- ◆ Factory installed T&P valve
- ◆ Factory installed brass drain valve
- ◆ Top and side Geothermal connections
- ◆ Two magnesium anodes
- ◆ Steel exterior with powder coat finish
- ◆ 6-Year tank warranty - residential applications
- ◆ 3-Year tank warranty - non-residential applications

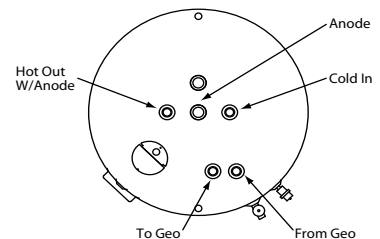

Model	Storage (gal)	Domestic Water Conn.	Geothermal Conn. Top/Side	Dimensions							Shipping Weight (lbs)
				A	B	C	D	E	F	G	
60GSTE	60	1"	1" / 1½"	22"	60"	52¼"	52¼"	29¼"	17"	4¼"	235
80GSTE	80	1"	1" / 1½"	24"	64"	57⅞"	57⅞"	31½"	19¼"	6½"	252
119GSTE	119	1"	1" / 1½"	28"	65"	57¾"	57¾"	33¾"	16¼"	8¾"	382

Electrical Rating: 4.5KW, 240V

Warning: Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z21.10.1.

Caution: The recommended maximum hot water temperature setting for normal residential use is 120° F. Manufacturer recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

Pressures (all): Working Pressure, 150 psi; Testing Pressure, 300 psi

Universal Technologies of Wisconsin, Inc.
110 South Dickinson Street, Madison, Wisconsin 53703
Toll Free 866-759-0067 • Fax 608-257-5304
WWW.GEOSTOR.NET

GS100 ST Rev 3-12