



# GEO-STOR™

## Geothermal Water Storage

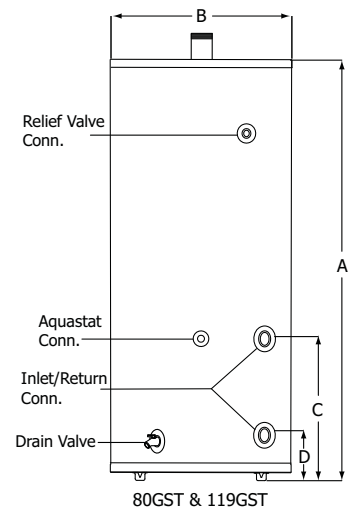

- C<sup>g</sup>glass®-porcelain fused-to-steel is impervious to chlorine and caustics - **the ideal water vessel**
- 30 to 119 gallon capacities (standard construction)
- ASME construction sized from 119 to 1000 gallons
- Magnesium anodes
- Steel exterior with powder coat finish
- 2" top and side NPT connections
- Factory installed brass drain valve
- 5-Year tank warranty - residential applications
- 3-Year tank warranty - non-residential applications

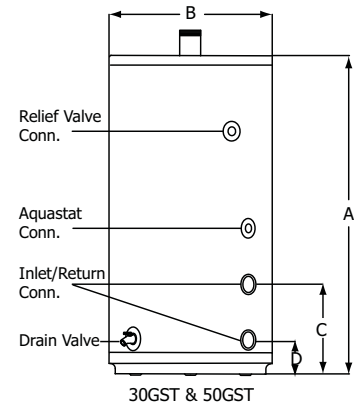

Model	Storage (gal)	T&P Relief Valve Conn.	Inlet/Return Conn.	Hot Outlet Conn.	Dimensions					Shipping Weight (lbs)
					A	B	C	D	E	
30GST	30	3/4"	2" / 2"	2"	39 1/2"	20"	11 1/4"	4 3/8"	N/A	148
50GST	50	3/4"	2" / 2"	2"	48 1/2"	22"	11"	4 1/4"	N/A	186
80GST	80	3/4"	2" / 2"	2"	60 1/2"	24"	22"	7"	N/A	247
119GST	119	1"	2" / 2"	2"	65 1/2"	28"	22"	7"	N/A	382

\*Additional sizes to 1,000 gallon capacities available in ASME and Standard Construction.

**Warning:** Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z21.10.1.

**Caution:** The recommended maximum hot water temperature setting for normal residential use is 120° F. Manufacturer recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

**Pressures (all):** Working Pressure, 150 psi; Testing Pressure, 300 psi

**Universal Technologies of Wisconsin, Inc.**  
**110 South Dickinson Street, Madison, Wisconsin 53703**  
**Toll Free 866-759-0067 • Fax 608.257.5304**